

PROCONTROL[®]

ProxerSafe Web Access

Quick User Guide

ver1.4

Table of contents

ProxerSafe Web Access	3
Login	3
Language selection	3
Frame	4
Users	6
Add a new user	6
Edit user	7
Delete user	8
Keys	9
Edit a key	9
Editing key rights (key access rights).....	10
Right groups	12
Key reservations	14
Adding key reservation.....	14
Editing key reservation	15
Deleting key reservation.....	15
Event history	16
Administration – Parameters	17
Setting scale parameters.....	17
Logout	18

ProxerSafe Web Access

Using the ProxerSafe Web Access auxiliary service, managing and administrating ProxerSafe cabinets via network/ web becomes possible.


In order to access the service, type in the IP address of the cabinet into the address bar of the web browser.



Supported browsers are: Google Chrome, Mozilla Firefox and Microsoft Edge

Login

Logging in the web interface is possible for all users, though users without administrator rights may see event logs only. To log in the interface, enter the username and the PIN (or the card number at reader with keyboard emulation)

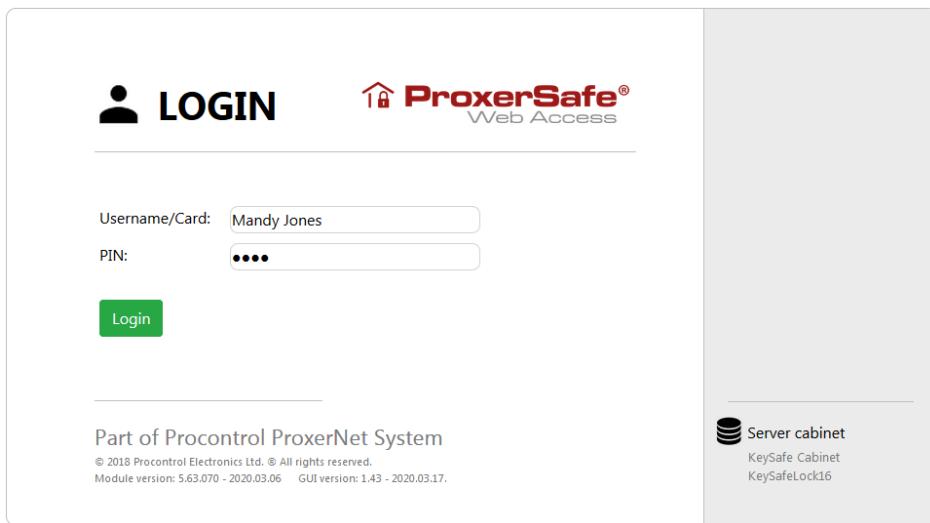


The screenshot shows the ProxerSafe Web Access login page. At the top left is a user icon and the word "LOGIN". At the top right is the ProxerSafe logo with the text "Web Access". Below these are two input fields: "Username/Card:" containing "Mandy Jones" and "PIN:" containing "****". A green "Login" button is below the PIN field. At the bottom left, it says "Part of Procontrol ProxerNet System" and provides copyright information: "© 2018 Procontrol Electronics Ltd. All rights reserved. Module version: 5.63.070 - 2020.03.06 GUI version: 1.43 - 2020.03.17.". On the right side of the page, there is a sidebar with the text "Server cabinet", "KeySafe Cabinet", and "KeySafeLock16".


Language selection

After logging in you may select the language if the language you wish to choose differs from the default language of your browser.

The language selector button is at the top-right corner of the screen. Available languages are English, Hungarian and Swedish.

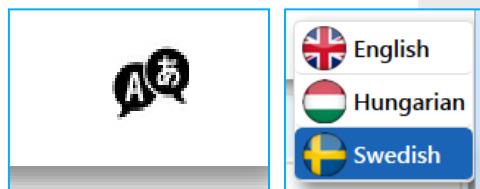

After successful login the following page is shown with admin rights:

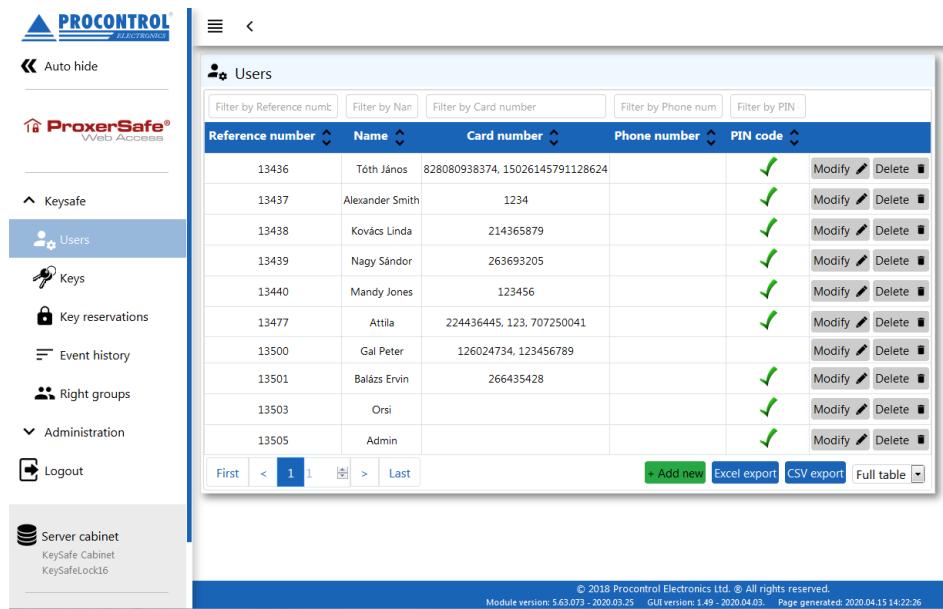


Reference number	Name	Card number	Phone number	PIN code
13436	Tóth János	828080938374, 15026145791128624		✓ Modify Delete
13437	Alexander Smith	1234		✓ Modify Delete
13438	Kovács Linda	214365879		✓ Modify Delete
13439	Nagy Sándor	263693205		✓ Modify Delete
13440	Mandy Jones	123456		✓ Modify Delete
13477	Attila	224436445, 123. 707250041		✓ Modify Delete
13500	Gal Peter	126024734, 123456789		✓ Modify Delete
13501	Balázs Ervin	266435428		✓ Modify Delete
13503	Orsi			✓ Modify Delete
13505	Admin			✓ Modify Delete


Frame

On the left side of the page there is the menu with the available settings and options. The KeySafe and Administration menu items are drop-down.

The left menu bar can be hidden by clicking the Auto hide button for easy handling.

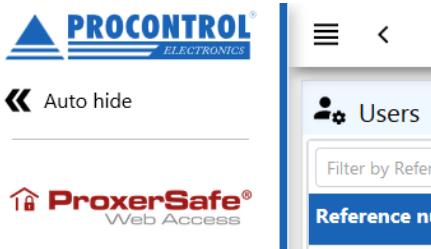


From to filtering can be set at the column in date format.

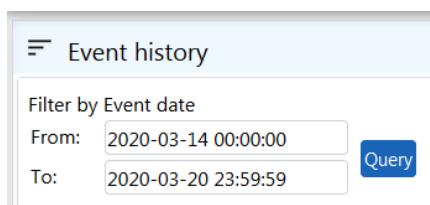

The number of the records shown per page can be set. Filtering or sorting can be set at all columns.

Editing the table is possible by using the buttons at the end of the rows and the Edit button at the top or bottom of the table, in some cases by double clicking the row. You can choose page by the pager at the bottom of the site.

Deletion is possible on certain pages by the Delete button; all deletion must be confirmed by the user.

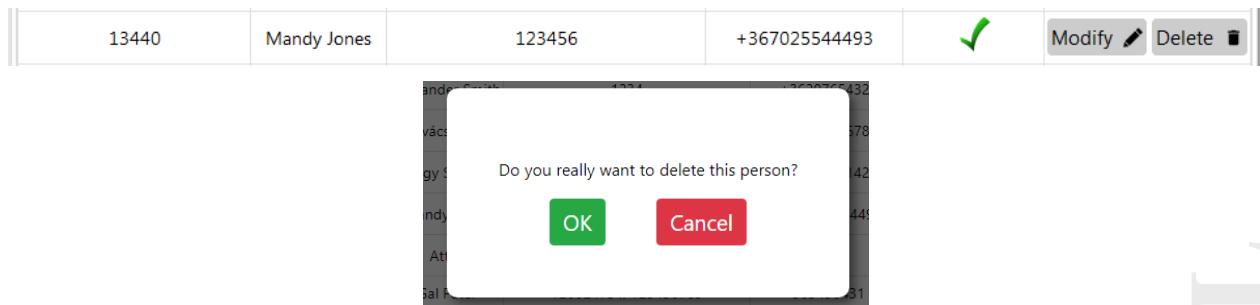

With the Excel export and CSV export buttons .xlsx and .csv format files can be extracted from the given page of the table or the whole table.



Information on the key cabinet and the users logged in can be found in the blocks at the bottom of the left menu bar.

At the bottom of the page there are the version number of the software and the *page generated* date, which may be useful at possible product support.



© 2018 Procontrol Electronics Ltd. ® All rights reserved.
Module version: 5.63.071 - 2020.03.18 GUI version: 1.45 - 2020.03.20 Page generated: 2020.03.20 10:36:47

Users


On the Persons tab one can edit the users of the cabinet. The personal data can be filtered and ordered. New person can be added with the „+ Add new” button; persons can be deleted with the „Delete” button, and edited with the „Modify” button.

Add a new user

Clicking/ tapping the „Add new” button, a form appears where one can add the user's personal data. The reference data is a 5-digit long value set automatically (subsequent value is set), but it can be overwritten.

Edit user

Clicking the „Modify” button, a similar form appears containing the earlier added data. Reference number cannot be edited anymore.

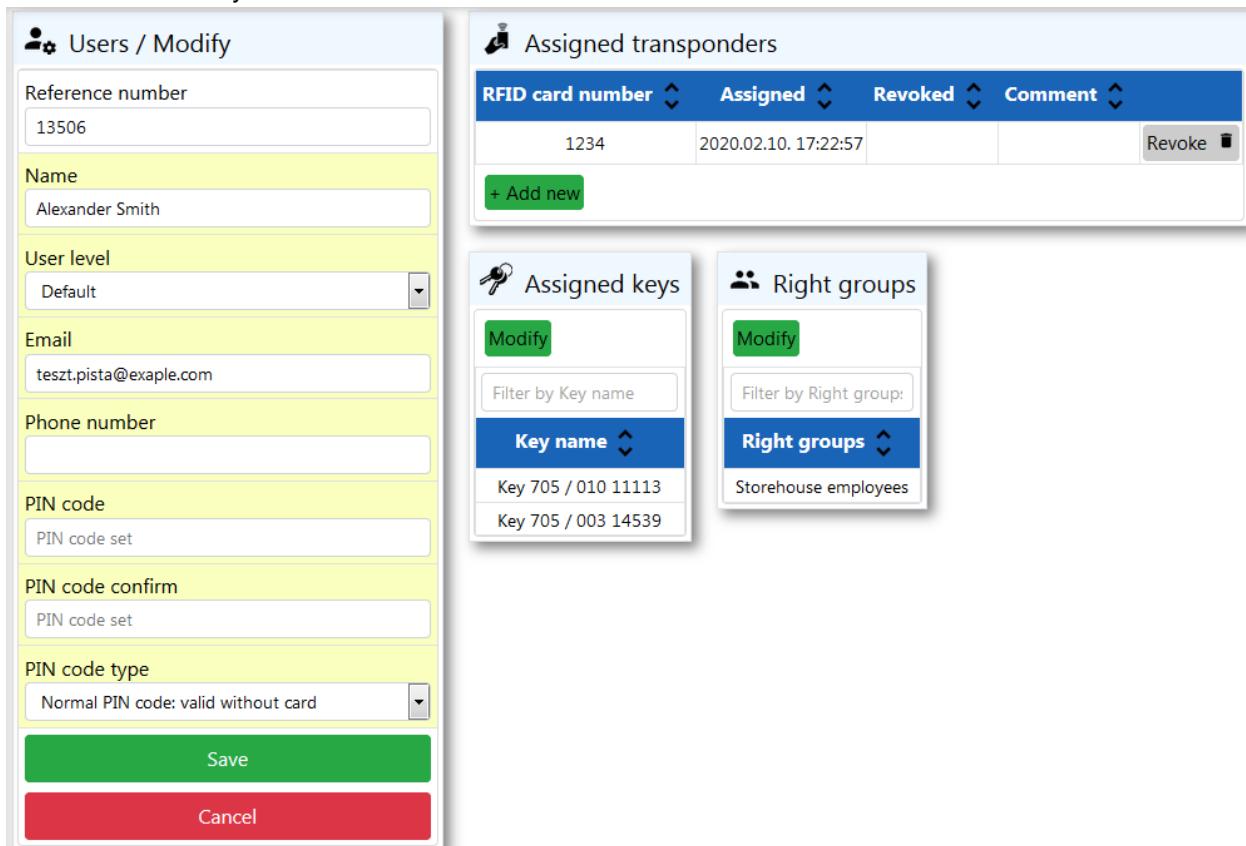

The screenshot shows the 'Users / Modify' form with the following fields:

- Reference number: 13506
- Name: Alexander Smith
- User level: Default
- Email: teszt.pista@exaple.com
- Phone number: (empty)
- PIN code: PIN code set
- PIN code confirm: PIN code set
- PIN code type: Normal PIN code: valid without card

Below the form are three windows:

- Assigned transponders:** Shows a table with one entry: RFID card number 1234, Assigned 2020.02.10. 17:22:57, Revoked (button), Comment (button).
- Assigned keys:** Shows a table with two entries: Key 705 / 010 11113 and Key 705 / 003 14539. Buttons: Modify, Filter by Key name, Key name dropdown.
- Right groups:** Shows a table with one entry: Right groups Storehouse employees. Buttons: Modify, Filter by Right group, Right groups dropdown.

In case there is a PIN set for the person, the „PIN code set” text is shown.

PIN code
PIN code set

PIN can be deleted by entering “-“ character into the PIN field and the PIN confirmation field.

In case there is no PIN set for the person, the „No PIN code set” text is shown.

PIN code
No PIN code set

A transponder number (card number) can be set as well besides the PIN for a user.

The assigned transponders are shown in the Assigned transponders window. Assigned transponders can be enabled too (Revoke button).

 Assigned transponders

RFID card number	Assigned	Revoked	Comment
214365879	2020.01.27. 14:43:31		

[+ Add new](#) [Revoke](#)

With the +Add new button new transponder can be assigned to the person:


 Assigned transponders / Add new

Existing card numbers	<input type="text"/>
New card number	<input type="text"/>
Assign from	2020-03-23 12:06:22
Revoke from	<input type="text"/>
Comment	<input type="text"/>

[OK](#) [Cancel](#)

Delete user

When deleting a person, the webpage asks for confirmation. To confirm deletion, click OK.

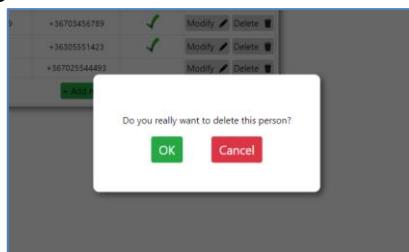

Keys

This menu lists the keys in the cabinet. The keys can be edited with the „Modify” button, but no new keys can be added.

Keys								
Key name	Transponder	Native cabinet / slot	Current cabinet / slot	Last event date	Last operation	Last user	Phone number	
Key 705 / 001 14892	14892	KeySafe (reader)/001	KeySafe (reader)/001	2020.03.16. 09:06:05	Key return	Balázs Ervin		<button>Modify</button>
Key 705 / 002 14400	14400	KeySafe (reader)/002	KeySafe (reader)/002	2020.03.16. 09:06:13	Key return	Balázs Ervin		<button>Modify</button>
Key 705 / 003 14539	14539	KeySafe (reader)/003	KeySafe (reader)/003	2020.01.27. 15:12:11	Key return	Tóth János	+36301234567	<button>Modify</button>
Key 705 / 004 14382	14382	KeySafe (reader)/004	KeySafe (reader)/004	2019.11.20. 00:07:39	Key return			<button>Modify</button>
Key 705 / 005 14998	14998	KeySafe (reader)/005		2020.01.27. 15:12:48	Key pick	Kovács Linda	+36703456789	<button>Modify</button>
Key 705 / 006 12921	12921	KeySafe (reader)/006	KeySafe (reader)/006	2019.11.20. 00:07:39	Key return			<button>Modify</button>
Key 705 / 007 14032	14032	KeySafe (reader)/007	KeySafe (reader)/007	2020.02.11. 19:18:26	Key return	Attila		<button>Modify</button>
Key 705 / 008 14626	14626	KeySafe (reader)/008		2020.02.17. 11:02:39	Key pick	Attila		<button>Modify</button>
Key 705 / 009 12597	12597	KeySafe (reader)/009	KeySafe (reader)/009	2020.02.10. 18:01:55	Key return	Tóth János	+36301234567	<button>Modify</button>
Key 705 / 010 11113	11113	KeySafe (reader)/010	KeySafe (reader)/010	2020.02.10. 18:21:10	Key return	Attila		<button>Modify</button>
Key 705 / 011 11082	11082	KeySafe (reader)/011	KeySafe (reader)/011	2019.11.20. 00:07:39	Key return			<button>Modify</button>
Key 705 / 012 12012	12012	KeySafe (reader)/012		2020.02.10. 18:21:16	Key pick	Attila		<button>Modify</button>
Key 705 / 013 11268	11268	KeySafe (reader)/013		2020.01.27. 15:13:06	Key pick	Tóth János	+36301234567	<button>Modify</button>
Key 705 / 014 14642	14642	KeySafe (reader)/014		2020.01.27. 15:13:01	Key pick	Tóth János	+36301234567	<button>Modify</button>
Key 705 / 015 14719	14719	KeySafe (reader)/015		2020.02.23. 15:24:29	Key pick	Tóth János	+36301234567	<button>Modify</button>
Key 705 / 016 12033	12033	KeySafe (reader)/016		2020.01.27. 15:13:51	Key pick	Nagy Sándor	+36305551423	<button>Modify</button>

Edit a key

At editing a key, a form appears filled in with the data of the keys.

Keys / Modify

Key name	Key 705 / 010 11113
Transponder	11113
Native cabinet	KeySafe (reader)
Native slot number	10
Key usage time limit (min)	120
Key type	Car key

Authorized users

Modify

Reference number	Name
13436	Tóth János
13437	Alexander Smith
13438	Kovács Linda
13439	Nagy Sándor
13440	Mandy Jones

Editing key rights (key access rights)

The keys used by a user can be managed in the Users menu. Choose the user whose rights you wish to edit and double click on it or click Modify button.

In the Assigned keys window click the Modify button.

To add new key or enable an existing one, mark or unmark the checkbox before the key name, then save the changes by clicking OK.

Users					
Reference number	Name	Card number	Phone number	PIN code	
13436	Tóth János	828080938374, 15026145791128624		✓	Modify Delete
13437	Alexander Smith	1234		✓	Modify Delete
13438	Kovács Linda	214365879		✓	Modify Delete
13439	Nagy Sándor	263693205		✓	Modify Delete
13440	Mandy Jones	123456		✓	Modify Delete

Assigned keys

Modify

Filter by Key name

Key name

- Key 705 / 001 14892
- Key 705 / 002 14400
- Key 705 / 005 14998
- Key 705 / 006 12921
- Key 705 / 007 14032
- Key 705 / 009 12597
- Key 705 / 010 11113

Assigned keys / Modify

Select all Clear all

- Key 705 / 001 14892
- Key 705 / 002 14400
- Key 705 / 003 14539
- Key 705 / 004 14382
- Key 705 / 005 14998
- Key 705 / 006 12921
- Key 705 / 007 14032
- Key 705 / 008 14626
- Key 705 / 009 12597
- Key 705 / 010 11113


OK Cancel

At editing keys in Keys menu there is the possibility to assign users to keys.




At the end of the key row click the Modify button.

Keys								
Key name	Transponder	Native cabinet / slot	Current cabinet / slot	Last event date	Last operation	Last user	Phone number	
Key 705 / 001 14892	14892	KeySafe (reader)/001	KeySafe (reader)/001	2020.03.16. 09:06:05	Key return	Balázs Ervin		
Key 705 / 002 14400	14400	KeySafe (reader)/002	KeySafe (reader)/002	2020.03.16. 09:06:13	Key return	Balázs Ervin		
Key 705 / 003 14539	14539	KeySafe (reader)/003	KeySafe (reader)/003	2020.01.27. 15:12:11	Key return	Tóth János		
Key 705 / 004 14382	14382	KeySafe (reader)/004	KeySafe (reader)/004	2019.11.20. 00:07:39	Key return			
Key 705 / 005 14998	14998	KeySafe (reader)/005		2020.01.27. 15:12:48	Key pick	Kovács Linda		
Key 705 / 006 12921	12921	KeySafe (reader)/006		2020.03.19. 14:31:01	Key pick	Kovács Linda		

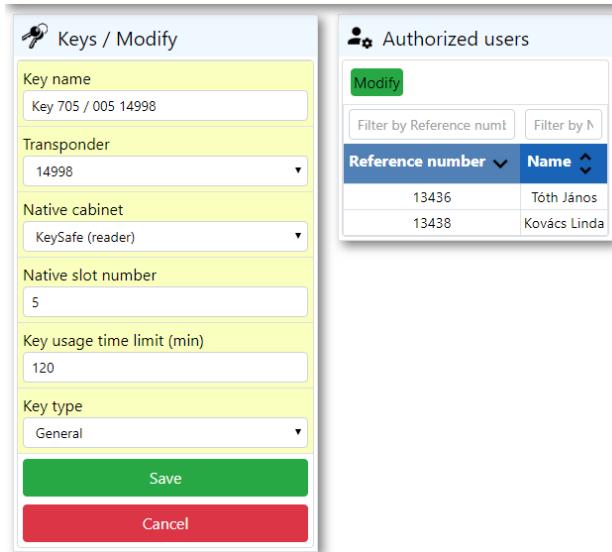

Reference number	Name
13436	Tóth János
13438	Kovács Linda

In the *Authorized users* window click the Modify button.

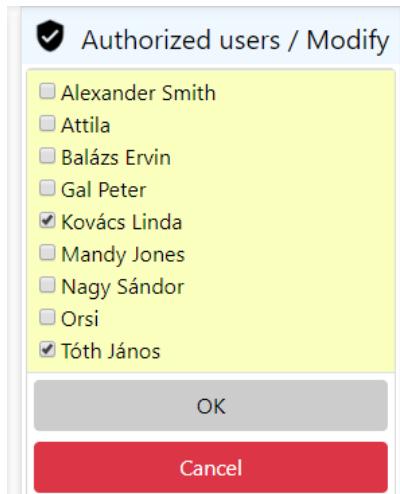

To ensure rights to a user or revoke rights mark or unmark the checkbox before the user name. Save the changes by clicking OK.

Right groups

Keys, which can be enabled for users, can be grouped in the “Right groups” menu.

Right groups	
Laboratory	Modify
Office	Modify

+ Add new Excel export CSV export Full table

At editing or creating a new right group you can choose the key rights and the authorized users.

Right groups / Add new

Name

Save

Cancel

Click +Add new, and enter the name of the new group; then click Save.

Right groups / Add new

Name

Storehouse emplo

Save

Cancel

From now on the method is the same as modification.

Right groups	
Name	
Laboratory	Modify
Office	Modify
Storehouse employees	Modify

+ Add new Excel export CSV export Full table

Click Modify button. In the appearing *Rights/ Modify* windows you can add (or later remove) key rights and authorized users.

Mark (or unmark) the checkbox before the key and user names to grant (or revoke) rights. Click OK in both windows after the modification and the Save in the Right groups/ Modify window.

Right groups / Modify

Name
Storehouse employees

Save

Cancel

Rights

Modify

Filter by Name

Name

OK

Cancel

Authorized users

Modify

Filter by Reference numt

Filter by N

Reference number

Name

Right groups / Modify

Name
Storehouse employees

Save

Cancel

Rights / Modify

- Korlátlan Szekrényzár Rendész
- Szekrényzár Rendész
- Key 705 / 001 14892
- Key 705 / 002 14400
- Key 705 / 003 14539
- Key 705 / 004 14382
- Key 705 / 005 14998
- Key 705 / 006 12921
- Key 705 / 007 14032
- Key 705 / 008 14626

OK

Cancel

Authorized users / Modify

- Alexander Smith
- Attila
- Balázs Ervin
- Gal Peter
- Kovács Linda
- Mandy Jones
- Nagy Sándor
- Orsi
- Tóth János

OK

Cancel

Right groups / Modify

Name
Storehouse employees

Save

Cancel

Rights

Modify

Filter by Name

Name

Key 705 / 001 14892

Key 705 / 003 14539

Key 705 / 005 14998

OK

Cancel

Authorized users

Modify

Filter by Reference numt

Filter by Nam

Reference number

Name

13437	Alexander Smith
13439	Nagy Sándor
13436	Tóth János

You may also create Right groups from the User menu at editing a user.

Right groups

Administration

Logout

Server cabinet

KeySafe Cabinet

KeySafeLock16

Logged in user

Mandy Jones

Right groups

Modify

Filter by Right groups

Right groups

Laboratory

Office

« Auto hide

ProxerSafe®
Web Access

^K Keysafe

Users

Keys

Key reservations

Event history

Users / Modify

Reference number	13505
Name	Attila
User level	Default
Email	
Phone number	
PIN code	PIN code set

Assigned transponders

RFID card number	Assigned	Revoked	Comment
224436445	2020.02.10. 18:03:37		
123	2020.02.20. 17:54:17		

+ Add new

Assigned keys

Key 705 / 001 14892

Right groups / Modify

Select all

Key reservations

In the “Key reservations” menu keys can be booked, reserved for users for a certain period of time. A key can be reserved only once for the given period of time.

« Auto hide

ProxerSafe®
Web Access

Key reservations

User Name	Key name	Native cabinet / slot	Reserve from	Reserve to	Modify	Delete
Gipsz Jakab	Key 705 / 001 14892	KeySafe (reader)/001	2020.02.06. 15:57:52	2020.02.07. 15:56:52		
Kovács Linda	Key 705 / 005 14998	KeySafe (reader)/005	2020.02.07. 10:07:41	2020.02.08. 10:06:41		
Teszt Pista	Key 705 / 009 12597	KeySafe (reader)/009	2020.02.12. 10:06:55	2020.02.14. 10:06:58		

First < 1 > Last

Adding key reservation

Clicking/ tapping +Add new button a form appears where the person, the key, the start and end date of the reservation can be set.

Editing key reservation

Clicking “Modify” button behind the row of the given reservation, a form appears just like at new reservation. User name, key name, reservation date (from, to) can be altered. Changes can be saved (save button) or rejected (cancel button)

Deleting key reservation

Key reservation can be deleted by clicking the “Delete” button at the end of the row.

Gipsz Jakab	Key 705 / 001 14892	KeySafe (reader)/001	2020.02.06. 15:57:52	2020.02.07. 15:56:52	Modify	Delete
Kovács Linda	Key 705 / 005 14998	KeySafe (reader)/005	2020.02.07. 10:07:41	2020.02.08. 10:06:41	Modify	Delete
Teszt Pista	Key 705 / 009 12597	KeySafe (reader)/009	2020.02.12. 10:06:55	2020.02.14. 10:06:58	Modify	Delete

Event history

In the event history the logs can be reviewed. The events can be filtered by a period of time or date. The default value is the previous week.

Event history

Filter by Event date
 From: 2020-01-20 10:13:29 Query
 To: 2020-01-27 15:34:05 Row/page: 100

Event date	Event description	Device	Person name	Identification	Key name	Place (cabinet / slot)
2020.01.27. 15:24:39	(555) Web interface login	KeySafe (reader)		PIN		
2020.01.27. 15:13:53	(511) door lock locked up	Locker	Nagy Sándor	PIN		
2020.01.27. 15:13:51	(540) pick up key	KeyModule 09-16	Nagy Sándor	PIN	Key 705 / 016 12033	KeySafe (reader) / 016
2020.01.27. 15:13:50	(542) return key	KeyModule 09-16	Nagy Sándor	PIN	Key 705 / 015 14719	KeySafe (reader) / 015
2020.01.27. 15:13:49	(540) pick up key	KeyModule 09-16	Nagy Sándor	PIN	Key 705 / 015 14719	KeySafe (reader) / 015
2020.01.27. 15:13:41	(512) door lock opened	Locker	Nagy Sándor	PIN		
2020.01.27. 15:13:40	(502) valid PIN code	KeySafe (reader)	Nagy Sándor	PIN		
2020.01.27. 15:13:08	(511) door lock locked up	Locker	Gipsz Jakab	PIN		
2020.01.27. 15:13:06	(540) pick up key	KeyModule 09-16	Gipsz Jakab	PIN	Key 705 / 013 11268	KeySafe (reader) / 013
2020.01.27. 15:13:01	(540) pick up key	KeyModule 09-16	Gipsz Jakab	PIN	Key 705 / 014 14642	KeySafe (reader) / 014
2020.01.27. 15:12:59	(512) door lock opened	Locker	Gipsz Jakab	PIN		
2020.01.27. 15:12:58	(502) valid PIN code	KeySafe (reader)	Gipsz Jakab	PIN		
2020.01.27. 15:12:58 (558) Alcohol test failed: cancelled		KeySafe (reader)	Gipsz Jakab	PIN		
2020.01.27. 15:12:51	(511) door lock locked up	Locker				
2020.01.27. 15:12:48	(540) pick up key	KeyModule 01-08	Kovács Linda	PIN	Key 705 / 005 14998	KeySafe (reader) / 005
2020.01.27. 15:12:45	(542) return key	KeyModule 01-08	Kovács Linda	PIN	Key 705 / 007 14032	KeySafe (reader) / 007
2020.01.27. 15:12:41	(540) pick up key	KeyModule 01-08	Kovács Linda	PIN	Key 705 / 007 14032	KeySafe (reader) / 007
2020.01.27. 15:12:40	(542) return key	KeyModule 09-16	Kovács Linda	PIN	Key 705 / 009 12597	KeySafe (reader) / 009
2020.01.27. 15:12:38	(540) pick up key	KeyModule 09-16	Kovács Linda	PIN	Key 705 / 009 12597	KeySafe (reader) / 009
2020.01.27. 15:12:34	(512) door lock opened	Locker	Kovács Linda	PIN		
2020.01.27. 15:12:33	(502) valid PIN code	KeySafe (reader)	Kovács Linda	PIN		
2020.01.27. 15:12:20	(511) door lock locked up	Locker				
2020.01.27. 15:12:16	(542) return key	KeyModule 09-16	Gipsz Jakab	PIN	Key 705 / 016 12033	KeySafe (reader) / 016
2020.01.27. 15:12:14	(512) door lock opened	KeyModule 09-16	Gipsz Jakab	PIN	Key 705 / 002 14400	KeySafe (reader) / 002

© 2018 Procontrol Electronics Ltd. All rights reserved.
 Module version: 5.63.067 - 2020.01.21 Karc version: 1.0.2 - 2019.02.12 Page generated: 2020.02.07 10:14:14

The event logs can be accessed by users without administrator right, but they can see only the keys they are entitled to.

Event history

Filter by Event date
 From: 2020-01-27 00:00:00 Query
 To: 2020-02-03 23:59:59 Row/page: 100


Event date	Event description	Device	Person name	Identification	Key name	Place (cabinet / slot)
2020.01.27. 17:13:57	(516) key was not returned in time	KeySafe (reader)			Key 705 / 005 14998	
2020.01.27. 15:12:48	(540) pick up key	KeyModule 01-08	Kovács Linda	PIN	Key 705 / 005 14998	KeySafe (reader) / 005
2020.01.27. 15:12:45	(542) return key	KeyModule 01-08	Kovács Linda	PIN	Key 705 / 007 14032	KeySafe (reader) / 007
2020.01.27. 15:12:41	(540) pick up key	KeyModule 01-08	Kovács Linda	PIN	Key 705 / 007 14032	KeySafe (reader) / 007
2020.01.27. 15:12:40	(542) return key	KeyModule 09-16	Kovács Linda	PIN	Key 705 / 009 12597	KeySafe (reader) / 009
2020.01.27. 15:12:38	(540) pick up key	KeyModule 09-16	Kovács Linda	PIN	Key 705 / 009 12597	KeySafe (reader) / 009
2020.01.27. 15:12:09	(542) return key	KeyModule 01-08	Gipsz Jakab	PIN	Key 705 / 002 14400	KeySafe (reader) / 002

First < 1 1 > Last Excel export CSV export Full table ▾

Administration – Parameters

Parameters can be edited by clicking on the Modify button at the end of the row.

Please be careful at altering settings and parameters. In case you have any question, please contact the manufacturer/ operator.

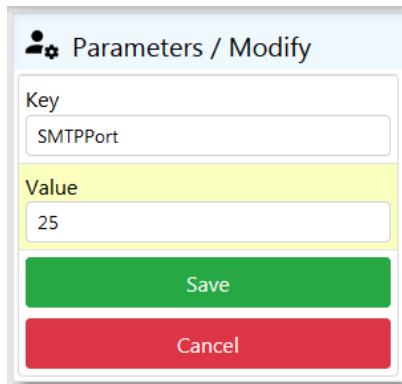

Setting scale parameters

In case scales are integrated into the ProxerSafe cabinet, the following scale parameters can be set.

In a Weapons storage cabinet alarms, email alerts can be set

Category	Key	Value
HWServer	AutosafeEmailTextOfScale1OutOfLimits	Event: Pistol - Weight is out of limit. Current weight: %u g Min: %u Max: %u Device: %s (ID: %u). Person : %s (ID: %u). Event code: %u
HWServer	AutosafeEmailTextOfScale2OutOfLimits	Event: Magazine - Weight is out of limit. Current weight: %u g Min: %u Max: %u Device: %s (ID: %u). Person : %s (ID: %u). Event code: %u
HWServer	AutosafeScale1.MaxValue	500
HWServer	AutosafeScale1.MinValue	400
HWServer	AutosafeScale1.Offset	-2
HWServer	AutosafeScale1.Ratio	1000
HWServer	AutosafeScale2.MaxValue	50
HWServer	AutosafeScale2.MinValue	280
HWServer	AutosafeScale2.Offset	0
HWServer	AutosafeScale2.Ratio	1000
HWServer	KeysafeSendAlertScale1OutOfLimits	FALSE
HWServer	KeysafeSendAlertScale2OutOfLimits	FALSE

First < 1 > Last

AutosafeScale1.MaxValue: setting maximum accepted weight at the primary scale (for weapon)

AutosafeScale1.MinValue: setting minimum accepted weight at the primary scale (for weapon)

Please note that by default weight is to be set for weapon without magazine. Also, the physical design of the weapon storage part is to prevent that a weapon with magazine inside is placed in.

AutosafeScale1.Offset: for setting tare weight at the primary scale

AutosafeScale2.MaxValue: setting maximum accepted weight at the secondary scale (for magazine)

AutosafeScale2.MinValue: setting minimum accepted weight at the secondary scale (for magazine)

AutosafeScale2Offset: for setting tare weight at the secondary scale

KeysafeSendAlertScale1OutofLimits: the cabinet can send alert (to email address if set correctly and to screen) if the placed in object is out of the weight limit (either below or above) at scale1

KeysafeSendAlertScale2OutofLimits: the cabinet can send alert (to email address if set correctly and to screen) if the placed in object is out of the weight limit (either below or above) at scale2

Logout

To leave the web interface use the „Logout” button. (Closing the window, the user gets logged out as well.)



Logout